


# Looseness Elimination Treatment

Treatment can be applied  
even if it is only for  
**A Single Screw.**

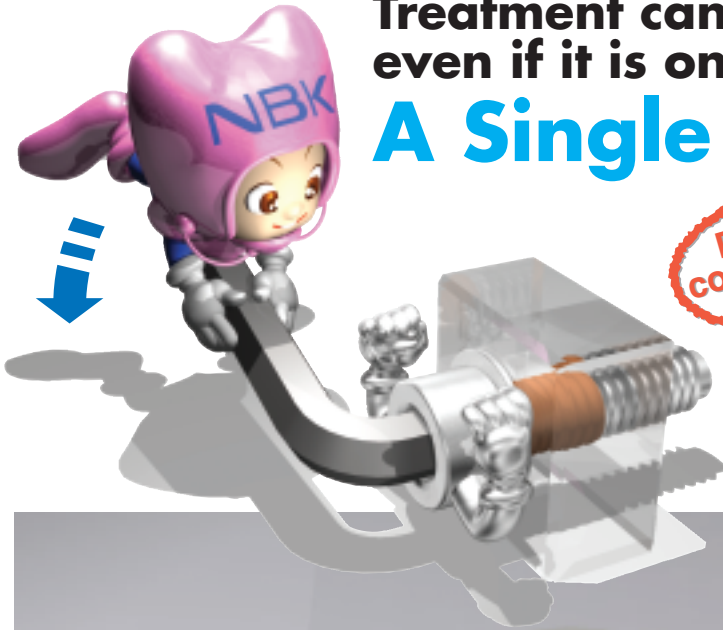

Please contact us!

## Customer Service


phone +81-575-23-1162  
fax +81-575-23-1129  
<http://www.nbk1560.com/english>  
e-mail: info@nbk1560.com

When making inquiries about looseness elimination treatment, please provide the following information:

- Type of looseness elimination treatment
- The screw's dimensions and the material it is composed of
- Quantity

## Adhesive Microcapsules

Each microcapsule contains an adhesive agent. When the screw is twisted into place, the microcapsules release the adhesive, creating a seal between the threads.

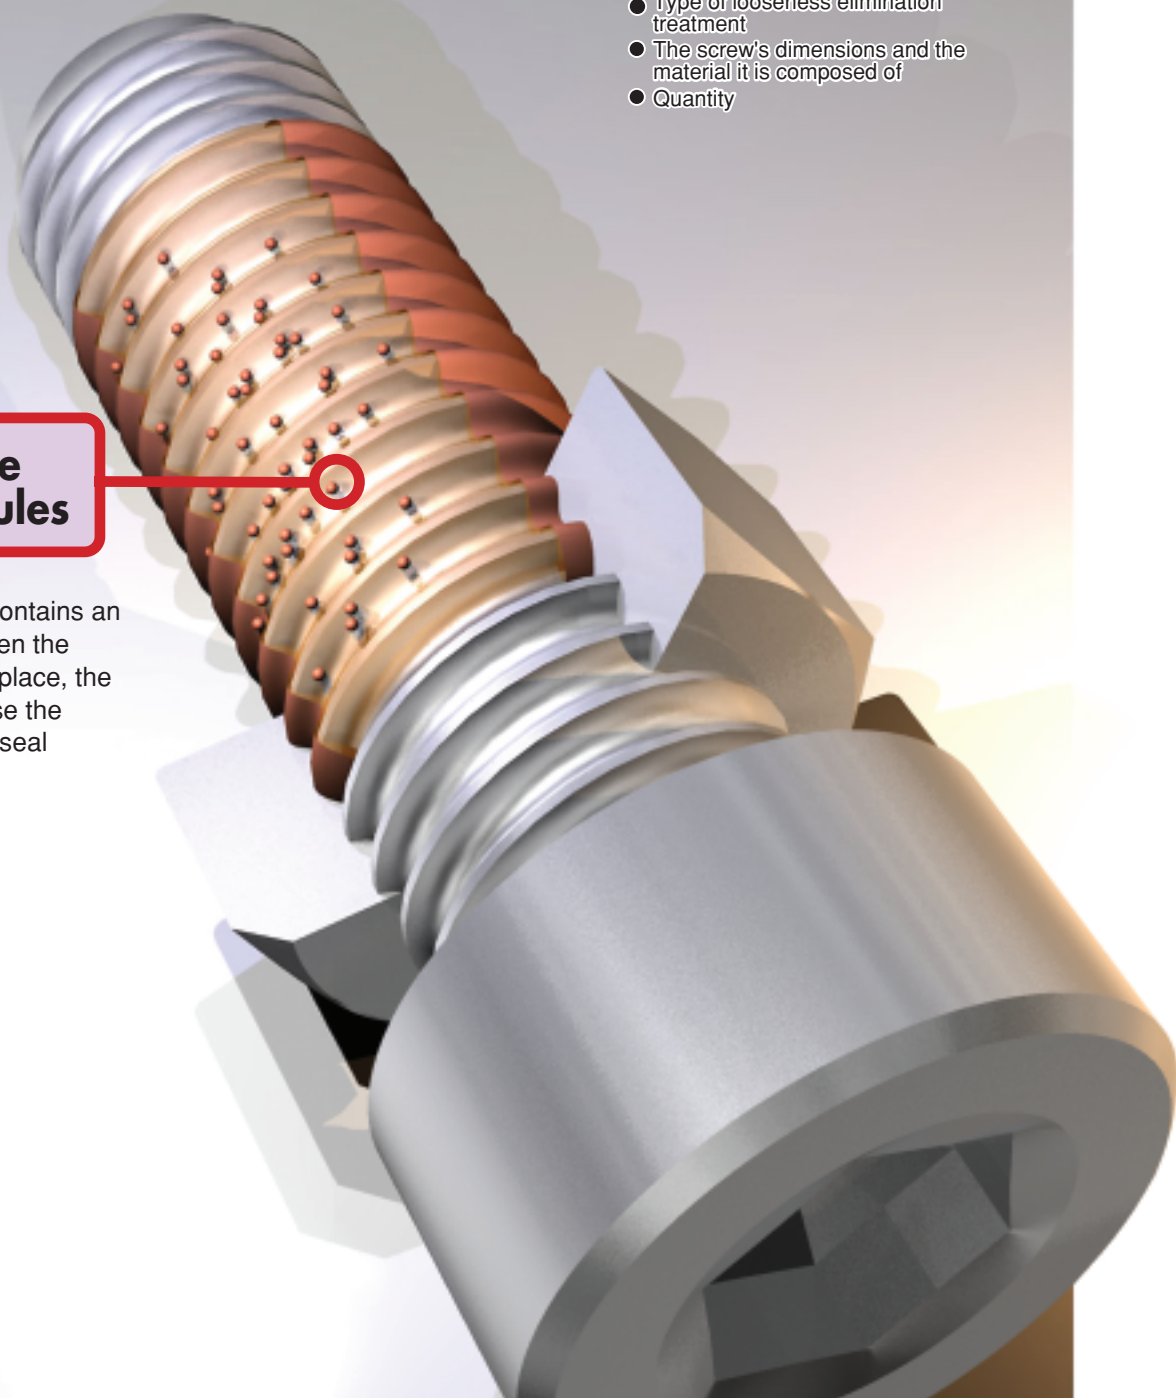

**Looseness Elimination Treatment**



Choose from 3 types of treatment.

**Looseness Elimination**

Recommended for FA equipment, machine tools, home appliances, communication equipment, office equipment, automobile transportation equipment and any other situation requiring screws with strong adhesive and/or sealing properties.

**Strong Adhesive**

**SG-161**

- Epoxy resin microcapsule
- Color: Orange
- Time required to reach practical strength: 20~30 hours
- Adhesive strength: 2.2N·m (M5 test results)



**Quick Drying**

**SG-160**

- Epoxy resin microcapsule
- Color: Blue
- Time required to reach practical strength: 1~2 hours
- Adhesive strength: 0.5N·m (M5 test results)



**Sealing**

For use with hydraulic and pneumatic equipment. Sealing tape and adhesive seals will become unnecessary, allowing you to save considerable time.

**SG-175**

- Composed of fluorosilicone resin
- Color: White
- Superior sealing properties
- Resistant to chemicals and high temperatures

